


Unity Architectural Remote Stations

- 12 Scene Fader Station with Master
- Fader Scene Control
- Available in White
- Status LEDs
- Blackout
- RS-485
- Five Gang Box
- Low Voltage

AF5113
Remote Station

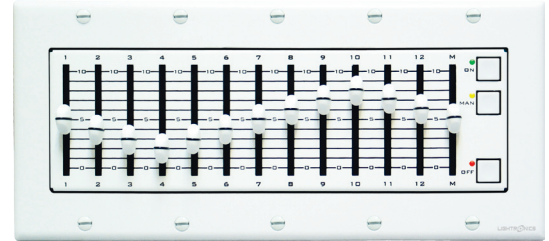

The AF5113 is a twelve scene, wall mount remote control unit intended for use with the Lightronics AR1202 Architectural dimmer. The unit fits in a standard five gang wall switch box. All power and data connections are via a 4 wire communication bus between itself and the AR1202 dimmer. In addition to manual fader control of twelve scenes, a master fader is provided. The master fader enables intensity control for all twelve scenes. Pushbutton switches are included to activate a blackout and full on selection. LED indicators provide status feedback. Multiple units may be chained together to provide dimmer control from various locations. The AF5113 may also be used with other Lightronics architectural remote stations.

SPECIFICATIONS

Scenes:	12 + Master Fader	Power Input:	18VDC provided by AR1202
Communication Bus:	Bidirectional RS-485	Size:	9.125"W x 4"H x 2.5"D
Wiring:	Dual Twisted Pair Data Cable	Weight:	1.1 Pounds

Architect & Engineer's Specifications

The AF5113 is a wall mounted, twelve scene, digital remote for use with the Lightronics AR1202 architectural dimmer. The AF5113 provides full manual control of 12 scenes which have been prestored in the dimmer unit. A master fader for overall intensity control is included. It is fully digital and runs at high speed to provide no lag operation. "ALL FULL UP" and "ALL OFF" controls are provided. Lighted indicators clearly show which mode is active. AF5113 wiring is low voltage. The AF5113 connects to the AR1202 via a shielded 4 conductor cable arranged as 2 twisted pairs. One pair connects to the data signals. The other pair carries the common and power. Scenes activated by the AF5113 are created and stored in the AR1202. No setup or turn on procedure is needed. When the AR1202 dimmer is powered on, the AF5113 will also be powered. Communication with the AF5113 is automatically established. The unit fits into a standard 5 gang wall switch box.

Power Input: 18VDC provided by AR1202; Dimensions: 9.125"W x 4"H x 2.5"D, Weight: 1.1 Pounds.

The unit shall be the Lightronics AF5113.

To view and/or download the Owner's Manual click here: www.lightronics.com/manuals/af5113m.pdf