

# Lighting Fixtures


- 18 - 8 Watt LEDs
- 164 Total Watts
- 4in1 Quad-Color LEDs
- RGBW
- Control System: DMX-512 + Stand Alone Modes
- Flicker Free (Refresh Rate >400 Hz)
- HD Video Compatible
- 4 / 5 / 7 Channel Operation
- 25° Lens (45° optional)
- Four Character LED Display
- 3-Pin DMX In/Out
- Double Yoke

**FXLD818FRP4I**  
LED LIGHTING FIXTURE



| SPECIFICATIONS     |                       |                   |                          |
|--------------------|-----------------------|-------------------|--------------------------|
| DMX Channels:      | 4/5/7                 | Power Connectors: | 20A Powercon             |
| DMX In/Out:        | 3-Pin XLR             | Refresh Rate:     | >400 Hz                  |
| Power Supply:      | 100 - 240 VAC 50/60Hz | IP Rating:        | IP20                     |
| Cooling:           | Internal Fan          | Size:             | 13.25"L x 11.8"W x 4.6"H |
| Power Consumption: | Max. 164W             | Weight:           | 15.5 lbs (7kg)           |


**PHOTOMETRICS**

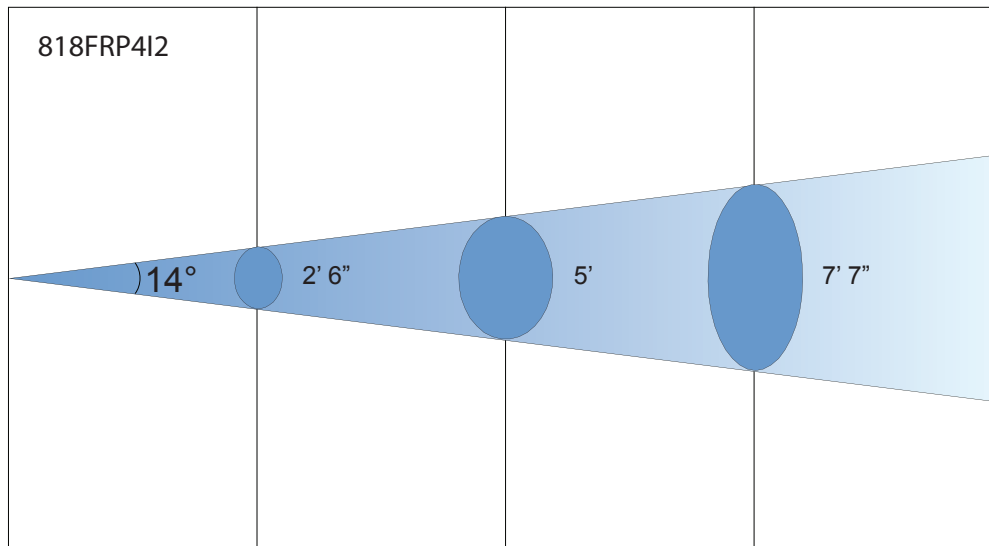

|              |              |              |
|--------------|--------------|--------------|
| 10'          | 20'          | 30'          |
| 3' Beam Dia. | 5' Beam Dia. | 7' Beam Dia. |
| 115 fc       | 36 fc        | 19 fc        |
| 1240 lux     | 394 lux      | 184 lux      |

To view and/or download the Owner's Manual click here: [www.lightronics.com/manuals/fxld818frp4im.pdf](http://www.lightronics.com/manuals/fxld818frp4im.pdf)

## PHOTOMETRICS

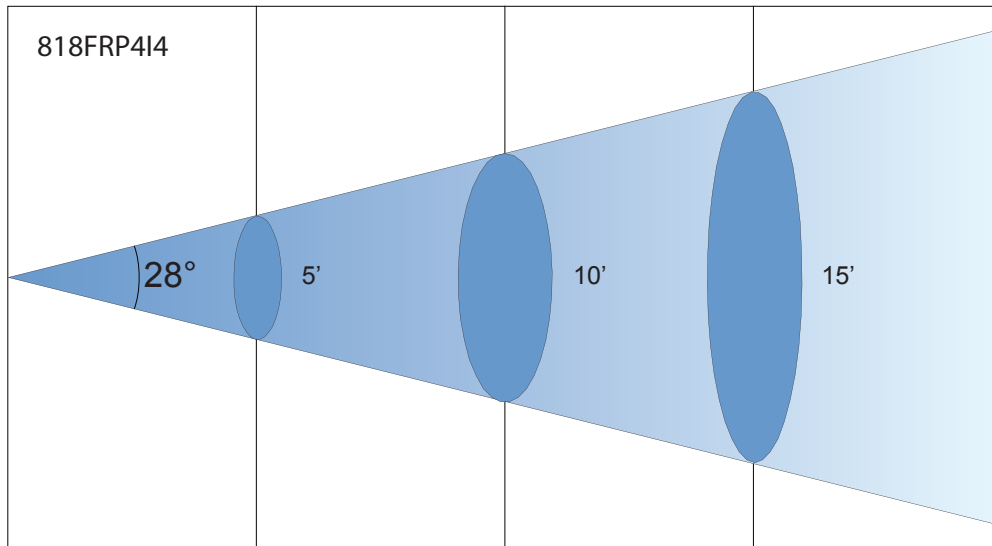

10'  
6' Beam Dia.  
105 fc  
1150 lux

20'  
10' Beam Dia.  
32 fc  
353 lux

30'  
15' Beam Dia.  
16 fc  
184 lux

To view and/or download the Owner's Manual click here: [www.lightronics.com/manuals/fxld818frp4im.pdf](http://www.lightronics.com/manuals/fxld818frp4im.pdf)